

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REC'D 07 JAN 2005

WIPO

PCT

PCT / SE 2004 / 001931

## Intyg Certificate

*Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*

(71) Sökande ABB Research Ltd, Zürich CH  
Applicant (s)

(21) Patentansökningsnummer 0303533-4  
Patent application number

(86) Ingivningsdatum 2003-12-22  
Date of filing

Stockholm, 2004-12-28

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Gunilla Larsson

Avgift  
Fee

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN**

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

### Ink. t. Patent- och Erväxet

1

2009 - 2-22

### Abstracted Reason

**9594 SE**

2003-12-22/AT

# A METHOD FOR POSITIONING AND A POSITIONING SYSTEM

5

## TECHNICAL FIELD

A method for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process.

10

## BACKGROUND ART

15 An industrial process is performed in a facility, for instance, a plant by a technical system comprising components such as industrial process equipment for operation, control, regulation and protection of the process. Industrial process equipment is for instance pieces of apparatus such as valves, motors, pumps, conveyors and tanks, instruments and meters, electrical energy conservation apparatuses, power devices, control apparatus, protective devices, industrial loads, such as arc furnaces and rolling mills, and other devices.

20

The industrial process also comprises an industrial system comprising systems for functionality, control and supervision. This is enabled as an automated system, embodied in a computerized system as a software implementation of the industrial system. Each system is used to define a certain kind of relation between the components. The functional system defines how a function can be divided into subfunctions, which also can be divided into subfunctions, and so on. Each subfunction in the lowest subfunction level is carried out by a component or an element of the component. The control system defines the execution of each subfunction and supervises the component performance. A common control system has intersections with predefined connections such as a hierarchical configuration or cells along a line. The control system is also a tool for the daily work for engineers and maintenance personnel. When planning and implementing a system, at a site, the control system is partly created and populated automatically in the system.

30

35

Inkl. t. Patent- och reg. Verket

2003-12-22

2

Handskrivet Klasson

5 The control functions of the industrial process also comprise a location system. The location system comprises representations of geographical areas and representations of specific devices, which are here called objects. The location system also defines how the components of the process are located within each other. The location system is also used to sort components according to their actual location. Essentially each component of the automated system is represented in both the functional system and the location system.

10 The industrial process is performed in an existing geographical area in an industrial facility, such as, a plant. Such a facility often comprises different existing geographical areas, such as production areas. These areas are often limited. When planning a production area, drawings for the physical location of each object of the production area are made. These drawings may also be used to implement the location system.

15 GB 2371884 describes a concept of a location system. However, the location system must be created manually as well as the population of the location system with components. Previously, the method in which to populate the location system has involved looking at Computer Aided Design (CAD) drawings and  
20 other paper-based information in order to define the representation of the different components in the correct location. Often the location system has not been used at all due to the amount of work required to configure it.

25 However, exchanging equipment which was never documented on a drawing, an insufficient CAD layout, maintenance over time or unforeseen installation complexity can cause the implementation of the real physical productions areas to be different from the planned location system.

30 Populating and repopulating an accurate location system with components quickly and without errors prevents several severe technical challenges.

#### SUMMARY OF THE INVENTION

35 The aim of the invention is to remedy the above-mentioned challenges. This aim is obtained by a method characterized by claim 1.

Tekn. Patent- och registreringsverket

3

2003-12-22

Huvudlexon Kassan

A method for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process comprises the following step:

- 5 - the step of creating a model of the facility, including position coordinates for major parts of the facility,
- the step of storing the model in a location system storage means,
- the step of identifying a component in a facility,
- the step of placing a mobile information processing device adjacent the component and detecting position coordinates for the mobile information processing device,
- 10 - the step of storing identification information of the component and position coordinates of the mobile information processing device in the location system storage means.

- 15 An advantage of the invention is the reliability of a faultless integration of new components in a location system. Another advantage is the simplicity of the operation.

- 20 In a first aspect of the invention a method is described for using the mobile information processing device to populate a location system in a computerized system and creating a graphical model of the facility comprising the components performing an industrial process, wherein the model has a representation such as a map, a drawing or a data display.

- 25 In another first aspect of the invention, a method is described that is used to create an architectonic model of a facility comprising the components performing an industrial process, a model such as a miniature model of the facility and the components.

- 30 In a preferred embodiment of the invention the following steps in the above described method is repeated for each component that is to be recorded in the location system: the step of identifying a component, the step of placing a mobile information processing device adjacent the component and detecting position coordinates for the mobile information processing device, and the step of
- 35 storing identification information of the component and position coordinates of the mobile information processing device in the location system storage means.

46 21 181386

Inkl. t. Patent- och registerverket

2003-12-22

4

Hans-Joergen Kressen

This is an advantage because a change in a facility usually affects more components than one.

5 In another preferred embodiment of the invention, a positioning system, such as a global positioning system, is used to detect the position coordinates of each position in a geographical area of the model. It is an advantage to use an existing system because there will be less new equipment needed. There is also an advantage to use an external satellite based system because it is calibrated outside the facility and therefore gives position information of a known accuracy.

10 In another preferred embodiment of the invention, one or more nodes of a wireless local area network is used to detect the position coordinates of each position of the model of the geographical area. This is an advantage because the system already comprises wireless nodes in the facility that can be used in the location system. This is also an advantage because an individual setting of location coordinates can be chosen.

20 In another preferred embodiment of the invention, button means or other input means is used to store the identification information of the component and position coordinates of the mobile information processing device in the location system. Other input means is voice sensitive means; gesture sensitive means those are advantageous if for instance the operator has to perform another task with his hands. This is also an advantage when a fast input in a complex environment is needed.

30 In another preferred embodiment of the invention, a data display means is used to store the identification information of the component and position coordinates of the mobile information processing device in the location system. The data display means is for instance a screen or a touch screen.

35 In another preferred embodiment of the invention, wireless communication means is used to store the identification information of the component and position coordinates of the mobile information processing device in the location system. This is an advantage because of the simplicity of wireless communication.



Int. 1. Patent- och registreringsverket

2003-12-22

5

Handläggaren Kossan

tion. This is also an advantage because of the easy access to equipment in a complex environment when no cables are needed.

5 In another preferred embodiment of the invention, a positioning system, such as a global positioning system, is used to detect the position coordinates of the location of the mobile information processing device. This has the same advantages as afore mentioned for a positioning system.

10 In another preferred embodiment of the invention, wireless means is used to detect the position coordinates of the location of the mobile information processing device. This has the same advantages as afore mentioned for wireless means.

15 In another preferred embodiment of the invention, a component comprises individual identification means attached to the component, such as a tag, e.g. bar code, a radio frequency tag or a wireless technology link and the component is identified in the control system by the individual identification means on the component. This is an advantage if the operator has not got this information.

20 In another preferred embodiment of the invention, the control system comprises image recognition means of the component and the component is identified in the control system by the image recognition means. This is an easy way of recognise a component. This is also an advantage if the component lacks other identification means.

25 In another preferred embodiment of the invention, a means to create position coordinates for a component in the location system when implementing the component in the control system is comprised.

30 In another preferred embodiment of the invention, a component is identified in the location system by navigating through a corresponding control system.

35 In another preferred embodiment of the invention, the model of the facility is separated in sub-areas, and each component located in that sub-area also has a sub-area position coordinate in the location system. This is an advantage because an industrial process often comprises several separate processing sys-

Ink. t. Patent och register

2003-12-22

6

Hans-Joachim Kasten

tems. The facility has location areas, sub-areas, such as main objects in a location system, such as robot cells in a car factory, robot cell 1, robot cell 2, etc. All robots in a certain robot cell and with sub-objects to the robots are then gathered in the system, located to that certain sub-area, a specific robot cell.

5

In another preferred embodiment of the invention, a component is located in a physical implementation by the location coordinates of the component in the location system.

10

In another preferred embodiment of the invention, clicking on a component or a sub-area in the location system selects that component or sub-area.

15

In another preferred embodiment of the invention, the graphical representation of the location system is a data display picture such as a spread sheet, a drawing and/or a diagram.

20

In another preferred embodiment of the invention, a computer program comprising programming instructions that control a computer or a computer process to perform a method in an industrial system for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, according to any of claims 1-17.

25

Another preferred embodiment of the invention is a computer program according to claim 18 recorded on one or several computer-readable media.

30

Another preferred embodiment of the invention is a graphical user interface for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process. The graphical user interface comprises:

- display means to display said at least one component,
- display means to display position coordinates for said component,
- input means to register the position coordinates of said component.

35

Another preferred embodiment of the invention is a graphical user interface according to claim 21, wherein the graphical user interface comprises:

- input means to register identification information of the component,

Inventor: Peter Carlsson

Applicant: ABB AB

7

Inventor: Peter Carlsson

- input means to register position coordinates of the mobile information.

Another preferred embodiment of the invention is a graphical user interface according to any of claims 21-22, wherein the graphical user interface comprises  
5 display means to identify a component.

Another preferred embodiment of the invention is a graphical user interface according to any of claims 21-23, wherein the graphical user interface comprises  
10 input means to register the position coordinates for the mobile information processing device.

Another preferred embodiment of the invention is a graphical user interface according to any of claims 21-24, wherein the graphical user interface comprises:  
15 - display means for creating a model of the facility, including position coordinates for major parts of the facility such as sub-areas,  
- input means to register position coordinates of the model.

Another preferred embodiment of the invention is a system for recording the position of at least one component in a location system of a control system of  
20 an industrial facility for an industrial process. The system comprises a mobile information processing device, such as a mobile hardware Personal Digital Assistant (PDA), a computer program, graphical user interface, a positioning system such as indoor or outdoor GPS, positioning by WLAN or other standards or protocols, or GSM, a location system and, a computer such as a tablet per-  
25 sonal computer PC.

Another preferred embodiment of the invention is a device for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, wherein the device comprises a  
30 processor 40, memory means 41, standard interface 44, and display input means.

Another preferred embodiment of the invention is a computerised industrial system including means to perform a method for recording the position of at  
35 least one component in a location system of a control system of an industrial facility for an industrial process, according to any of claims 1-18.



Another preferred embodiment of the invention is a database containing information to be used in a method in an industrial system for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, according to any of claims 1-18.

Another preferred embodiment of the invention is a website comprising means to perform a method in an industrial system for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, according to any of claims 1-19.

Another preferred embodiment of the invention is a data communication signal for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, wherein in the data signal comprising position information for a position of a mobile information processing device.

Another preferred embodiment of the invention is a data communication signal for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, wherein in the data signal comprising identification information of the component.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described in more detail in connection with the enclosed schematic drawings.

Figure 1 shows schematically a simplified layout of the functional system of a technical system, comprising electrical equipment, according to the prior art.

Figure 2 shows schematically a simplified layout of the location system of a technical system, comprising electrical equipment, according to the prior art.

Figure 3A shows a simplified layout of a location system corresponding to the technical system in an embodiment according to the invention,

Tek. L. Patent och Brevförhåll

9

2003-12-22

Hans-Erik Nilsson

Figure 3B shows a simplified layout of a corresponding location system to a technical system, comprising a geographical area representation with representations of components, in an embodiment according to the invention,

5

Figure 4 shows schematically a simplified physical layout for a technical system with identification means attached to the components and a hand-held mobile information processing device, according to the invention,

10

Figure 5 shows a schematic block diagram of a hardware configuration for a mobile information processing device, according to the invention,

Figure 6 shows schematically a software configuration for a mobile information processing, according to the invention,

15

Figure 7 shows a flowchart for a method for providing location information according to the invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

20

An industrial process comprises a technical system as a physical implementation, with physical components such as motors, valves etc, for operation, control, regulation and protection of the process. The technical system with its components is represented in a functional system.

25

Figure 1 shows a simplified layout of the functional system of a technical system comprising components, namely a generator 1, transformers 2, 3, 4, valves 6, 7, a motor 10, and loads 5, 8, 9. The functional system has essentially a hierarchical configuration. When the functional system is created, a corresponding computer representation for each of the physical component in the process is also implemented in a computerized system.

30

To supervise and control the process as well as the individual components the process also has a control system. The control system comprises means to create a computer representation for each of the components in the process, created as software. The computer representations are included and organized

35

Ink. t. Patent- och reg.verket

2003-12-22

10

Svea Patentkammaren

in the control system. The functional system and the control system share data. For instance, when a motor is added to the functional system, means will automatically be generated to add the motor to the control system.

- 5 In the industrial process technical system each component has an individual real geographical position, for instance a component on an industry floor. To give a geographical overview of a facility comprising components of a process, the process also comprises a location system. Figure 2 shows schematically a simplified layout of the location system, according to the prior art, of a process
- 10 comprising a technical system comprising components such as electrical equipment. The real facility in the industrial process technical system can for instance be represented as a three-dimensional system of position coordinates corresponding to the real geographical positions in a computer representation of the facility. Inside the system of coordinates there can be smaller system of
- 15 coordinates in order to get a higher resolution. The computer version is a duplicate of the real facility. The facility with its components is then present in two versions the real the facility with its components and the model, the computer representation of the facility with its components. In figure 2 a location system comprises components such as a valve 6, a load 8, or a motor 10 in a facility
- 20 30, in a location area such as a building 27, comprising other location areas. Physically the components are located on an industry floor. In the industrial process location system, each component has an individual relation as for the location of the component. Each component has a relation to that specific facility, in that specific building 27 and the specific location area 25 in the location
- 25 system.

- 30 The location system comprises means for a graphical computer representation of the physical implementation of the process. In the location system, graphical computer representations are created corresponding to location areas and area borders of the physical implementation of the process. The model of the facility may be separated in sub-areas, and each component located in that sub-area also has a sub-area position coordinate in the location system. The industrial process comprises several separate processing systems. The facility has sub-
- 35 areas such as location areas, and main objects in a location system. Figure 3A shows a simplified layout of a location system corresponding to the technical system comprising a graphical area representation, as a data display 20 com-

Kontroll- och  
2005-12-22

11

Patentansökan

prising a map. The map comprises a graphical computer representation for a building 21 in a facility 30, a plant. The building comprises graphical computer representations of the location areas 22, 23, 24, 26. The building and the location areas are sub-areas of the facility. Graphical computer representations are also created for each specific position of each component. Figure 3B shows a part of the location system 28 represented as a simplified layout of a technical system as a graphical computer representation of a building 27, the graphical computer representation of a building comprising a graphical computer representation of a location area 25 comprising a graphical computer representation of a component, a motor 10. A location area is, for instance, an industry floor, a robot cell etc. A component is, for instance, a motor, a valve etc. Another function of the location system is to find a specific object, such as a component.

When the control system is implemented, corresponding means for presentation of the components are also generated in the location system, in that a computer representation of the components that are a part of the system is available to create a location system. To populate the location system, the components must also be placed in the correct location in the location system by defining coordinates for the location.

20

A method for populating the location system comprises the following steps:

- Different areas of the production facility are set up, such as location areas and area borders, for instance, by dividing a map in areas with input of the geographical coordinates on the map. The geographical coordinates then correspond to the location coordinates such as the position coordinates and the sub-area coordinate in the location system.
- For each component in the location system representing a component, an input of the geographical coordinates of the component on the map is done.
  - a) First a model of the facility, including position coordinates for major parts of the facility, is created.
  - b) The model is stored in a location system storage means.
  - c) The user walks to one component that is present in the geographical area that is represented in the model and identifies the component.





Tekn. Patent och registrat

2003-12-22

Hans-Erik S. Karlsson

corded. Then the motor is established at the correct location in the location system.

- 5
- The valve 6, is also replaced. The arc furnace comprises identification means 65c. When the user arrives at the valve that already has a graphical representation and physical coordinates in the location system, the user finds the corresponding object in the control system (c). The user places the recording medium device adjacent the valve. The user records the physical coordinates in place on the recording medium 63 as described above (d). The mobile information processing device reads the identification means 65c on the valve and the motor is recognized in the control system. The wireless mobile information processing device physically locates the valve, and the new coordinates are recorded (e). Then the valve is established at the correct location in the location system. Then the valve also is established at the correct location in the location system.
- 10
- Components such as components that have moved or areas that need reconfiguration are simply updated by repeating the steps for each of the components.
- 15

20 The hand-held mobile information processing device is for instance an Internet-enabled mobile personal digital assistant (PDA) with access to the control system via wireless connectivity. The mobile information processing device comprises a user interface to carry out the input of physical coordinates in the location system of the location areas and borders and components of the facility.

25

The hand-held mobile information processing device is for instance in another embodiment of the invention an industrial robot instruction input device with access to the control system via a cable between the mobile information processing device and the component.

30

This recording of the device can be done in a number of ways:

- The mobile information processing device comprises a button 64 for the user to push for entering the current position of the device.
  - The mobile information processing device comprises text boxes 62 to enter the positions manually.
- 35







Ink. t. Patent- och registerverket

2009-12-22

Mått och mått

an integrated circuit with all the components on one board, or an encapsulated circuit containing all described blocks, and hence implementing the full functionality of the described invention. The encapsulation may comprise several interconnected silicon-based components, such as a radio, programmable hardware, a Central Processing Unit (CPU), and a memory.

The processed data may be stored in the memory 41 for later retrieval. The operational data is displayed on the display 62 on the mobile information processing device 63, communicated preferably by wireless means.

10

The operation on the wireless mobile information processing device is basically as follows for a device arranged in conjunction to operate in a technical system/industrial process:

- data is collected from an output means on the component
- 15 - the wireless device reads a wireless signal 43, such as an RF-tag, via wireless connection means to the system
- the wireless signal 43 is received via the antenna 46, processed in the radio hardware 45, passed to the communication protocol stacks 52, running in the processor 40 to an application program 50 as appropriate, and
- 20 - the signal is processed by the application program which generates location representation signals and other signals as required and sent via one or more output channels of the configurable hardware I/O interface 42,
- the wireless device sends a wireless signal via wireless connection means to the system
- 25 - the output signal 43 from the wireless mobile information processing device is received via a wire or data bus at an input node on a supervisory apparatus control unit for input to the system.

Figure 7 shows a flowchart for a method for providing location information by means of a wireless mobile information processing device based on operational data handled by the wireless mobile information processing device. The wireless mobile information processing device collects component data (11). The Component data is processed, and made available for display and use (12). The processed operational data, or part of it, may also be stored in memory (13). The control system is searched for the component (14). Position data is collected (15). The position data is processed, and made available for dis-

30

35



access to information, for instance via General Packet Radio Service (GPRS), WLAN, Bluetooth or other.

5 The microprocessor, or processors, of the wireless mobile information processing device comprises a central processing unit CPU performing the steps of the method according to an aspect of the invention. This is performed with the aid of one or more computer programs, which are stored at least in part in memory accessible by the processor. It is to be understood that the computer programs may also be run on one or more general-purpose industrial microprocessors or  
10 computers instead of a specially adapted computer.

The computer program comprises computer program code elements or software code portions that make the computer perform the method using equations, algorithms, data and calculations previously described. A part of the program may be stored in a processor as above, but also in ROM, RAM, PROM or  
15 EPROM chip or similar memory means, the program in part or in whole may also be stored on or in, another suitable computer-readable medium such as a magnetic disk, CD-ROM or DVD disk, hard disk, magneto-optical memory storage means, in a volatile memory, in a flash memory, as firmware, or stored on  
20 a data server.

The computer programs described may also be arranged in part as a distributed application capable of running on several different computers or computer systems at more or less the same time.

46 21 181386

Ink. t. Patent- och registreringsverket

9 123 12 2 2

19

Härmed bifogas Känslomärket

## CLAIMS

1. A method for recording the position of at least one component (6, 8, 10) in a location system (28) of a control system of an industrial facility (30) for an industrial process, **characterized by**
- 5 a) creating a model of the facility, including position coordinates for major parts of the facility,
- b) storing the model in a location system storage means,
- c) identifying a component in the facility,
- 10 d) placing a mobile information processing device (63) adjacent the component and detecting position coordinates for the mobile information processing device
- e) storing identification information of the component and position coordinates of the mobile information processing device in the location system storage means.
- 15
2. A method according to claim 1, **characterized by** repeating steps c, d and e for each component that is to be recorded in the location system.
3. A method according to any of the preceding claims, **characterized by**
- 20 using a positioning system, such as a global positioning system, to detect the position coordinates of each position in a geographical area of the model.
4. A method according to any of the preceding claims, **characterized by** using one or more nodes of wireless communication means to detect the position coordinates of each position in the model of the geographical area.
- 25
5. A method according to any of the preceding claims, **characterized by** using a wireless local area network to detect the position coordinates of each position in the model of the geographical area.
- 30
6. A method according to any of the preceding claims, **characterized by** using button means (64) or other input means (61, 62) to store the identification information of the component and position coordinates of the mobile information processing device in the location system.
- 35



7. A method according to any of the preceding claims, **characterized** by using a data display means (20) to store the identification information of the component and position coordinates of the mobile information processing device in the location system.

5 8. A method according to any of the preceding claims, **characterized** by using wireless communication means (61) to store the identification information of the component and position coordinates of the mobile information processing device in the location system.

10 9. A method according to any of the preceding claims, **characterized** by using a positioning system, such as a global positioning system, to detect the position coordinates of the location of the mobile information processing device.

15 10. A method according to any of the preceding claims, **characterized** by using wireless means to detect the position coordinates of the location of the mobile information processing device.

20 11. A method according to any of the preceding claims, **characterized** in that a component comprises individual identification means (65a, 65b, 65c) attached to the component, such as a tag, e.g. bar code, a radio frequency tag or a wireless technology link and by identifying the component in the control system by the individual identification means on the component.

25 12. A method according to any of the preceding claims, **characterized** in that the control system comprises image recognition means of the component and by identifying the component in the control system by the image recognition means.

30 13. A method according to any of the preceding claims, **characterized** by creating means to create position coordinates for a component in the location system when implementing the component in the control system.

Int. Patent- och registreringsverket

2003-12-22

Hans Henrik Karlsson

14. A method according to any of the preceding claims, **characterized** by identifying a component in the location system by navigating through a corresponding control system.
- 5 15. A method according to any of the preceding claims, **characterized** by separating the model of the facility in sub-areas (21, 22, 23, 24, 25, 26, 27) and that each component located in that sub-area also has a sub-area position coordinate in the location system.
- 10 16. A method according to any of the preceding claims, **characterized** by locating a component in a physical implementation by the location coordinates of the component in the location system.
- 15 17. A method according to any of the preceding claims, **characterized** in that clicking on a component or a sub-area in the location system selects that component or sub-area.
18. A method according to any of the preceding claims, **characterized** in that the graphical representation of the location system is a data display picture  
20 such as a spread sheet, a drawing and/or a diagram.
19. A method according to any of the preceding claims, **characterized** in that the mobile information processing device communicates with the control system through a cable between the device and the component, or the control  
25 system.
20. A computer program comprising programming instructions to control a computer or a computer process to make it perform a method in an industrial system for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, according to any of claims 1-19.
- 30
21. Use of a computer program according to claim 20 to control a computer or a computer process to make it perform a method in an industrial system for recording the position of at least one component in a location system of a con-  
35

46 21 181386

Inkl. t. Patent- och registrat

2003-12-22

Inkl. t. Patent- och registrat

22

control system of an industrial facility for an industrial process, according to any of claims 1-19.

22. A computer program according to claim 20 recorded on one or several computer-readable media.

23. A graphical user interface for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process **characterized** by comprising:

10 a) display means to display said at least one component,  
b) display means to display position coordinates for said component,  
c) input means to register the position coordinates of said component.

24. A graphical user interface according to claim 23, **characterized** by comprising

15 a) input means to register identification information of the component  
b) input means to register position coordinates of the mobile information.

25. A graphical user interface according to any of claims 23-24, **characterized** by comprising display means to identify a component.

26. A graphical user interface according to any of claims 23-25, **characterized** by comprising input means to register the position coordinates for the mobile information processing device.

27. A graphical user interface according to any of claims 23-26, **characterized** by comprising

25 a) display means for creating a model of the facility, including position coordinates for major parts of the facility such as sub-areas,  
30 b) input means to register position coordinates of the model.

28. A system for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process **characterized** by, comprising a mobile information processing device, such as a mobile hardware Personal Digital Assistant (PDA), a computer program, graphical user interface, a positioning system such as indoor or outdoor GPS,

35

Int. Patent document

2003-12-22

23

Hans-Joachim Klug

positioning by WLAN or other standards or protocols, or GSM, a location system and, a computer such as a tablet personal computer.

5 29. A system according to claim 28, **characterized by**, comprising wireless access to information, for instance via General Packet Radio Service (GPRS), WLAN, Bluetooth or other similar standards or protocols.

10 30. A mobile information processing device for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process **characterized** in that the device comprises a processor (40), memory means (41), standard interface (44), and input means.

15 31. A device according to claim 30, **characterized** in that the device comprises a radio antenna (46) and radio receiver/transmitter hardware (45), and wireless means.

32. A device according to claim 30-31, **characterized** in that it also comprises a wireless hardware member.

20 33. A device according to claim 30-32, **characterized** in that the wireless communication means is compatible with the ISM band with significant interference suppression means by spread spectrum technology.

25 34. A device according to claim 30-33, **characterized** in that the wireless communication means is compatible with a protocol wherein each data packet may be re-sent one or more times per second at different frequencies in the spectrum.

30 35. A device according to any of claims 30-34, **characterized** in that the device comprises a configurable hardware I/O interface (input/output interface) (42).

35 36. A computerised industrial system including means to perform a method in an industrial system for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, according to any of claims 1-19.



Tek. L. Patent och register

2003-12-22

24

Hans-Joachim Kamm

37. A database containing information to be used in a method in an industrial system for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, according to any of claims 1-19.

5

38. A website comprising means to perform a method in an industrial system for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, according to any of claims 1-19.

10

39. A data communication signal for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, **characterized** by comprising position information for a position of a mobile information processing device.

15

40. A data communication signal for recording the position of at least one component in a location system of a control system of an industrial facility for an industrial process, **characterized** by comprising identification information of the component.

20

181386



1 / 7

Ink. t. Patent- och reg. verkst

2003-12-22

Hendriksson Karsson

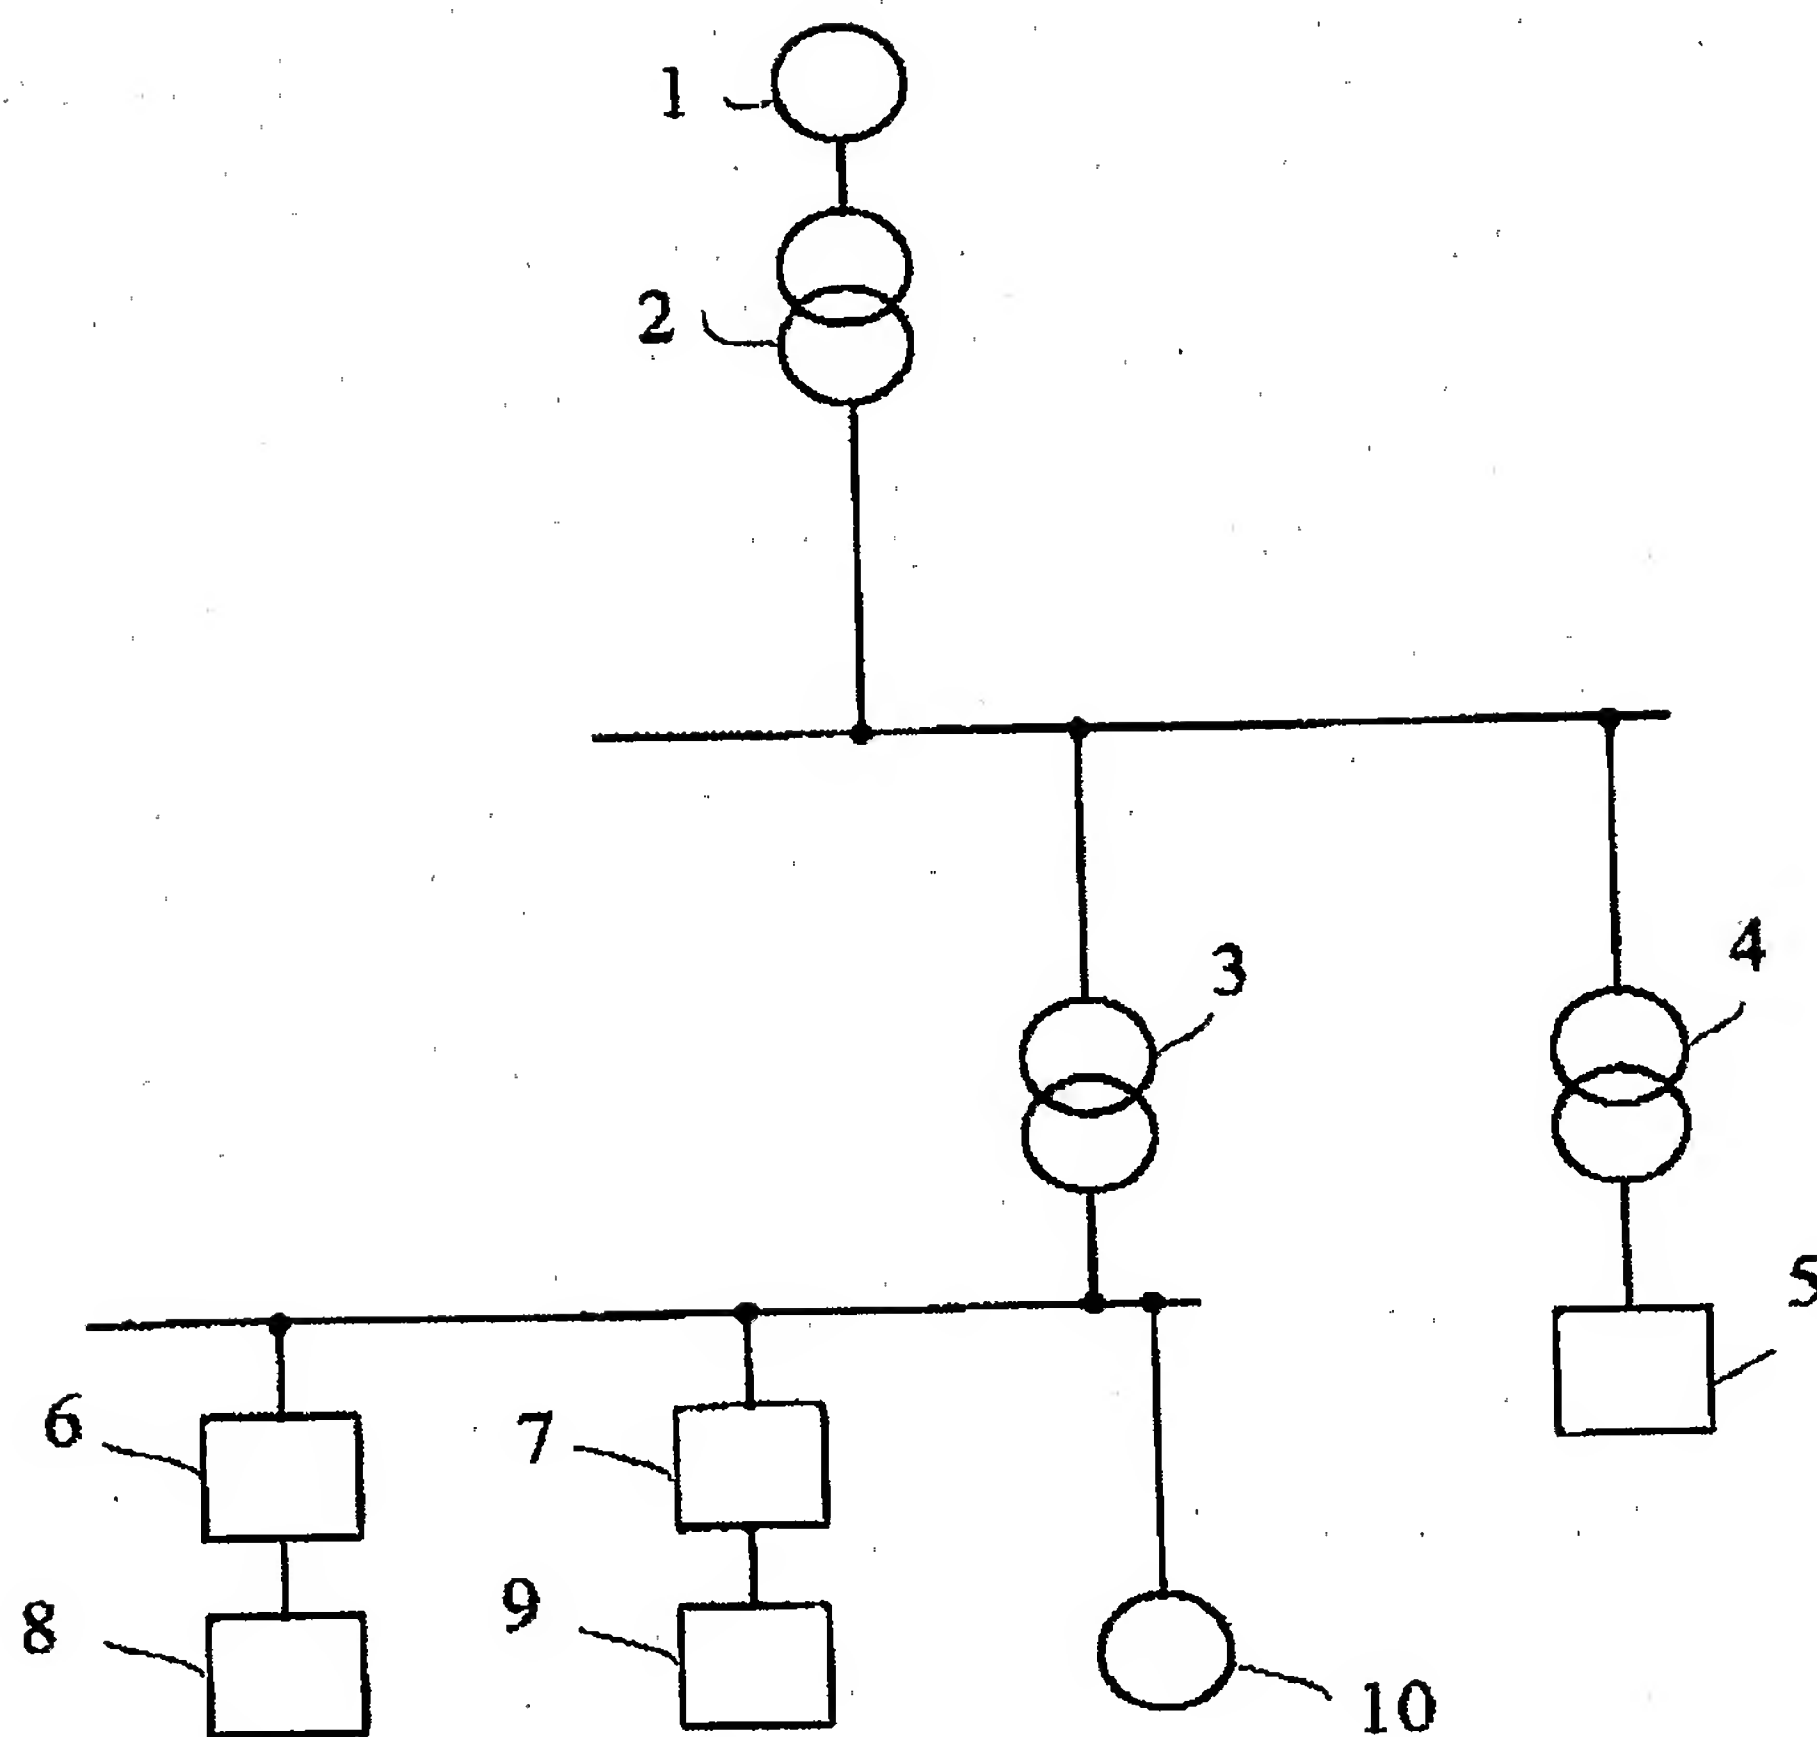


Fig. 1

2 / 7

Tek. t. Patent- och register

7000-12-22

Inventören: Karlsson

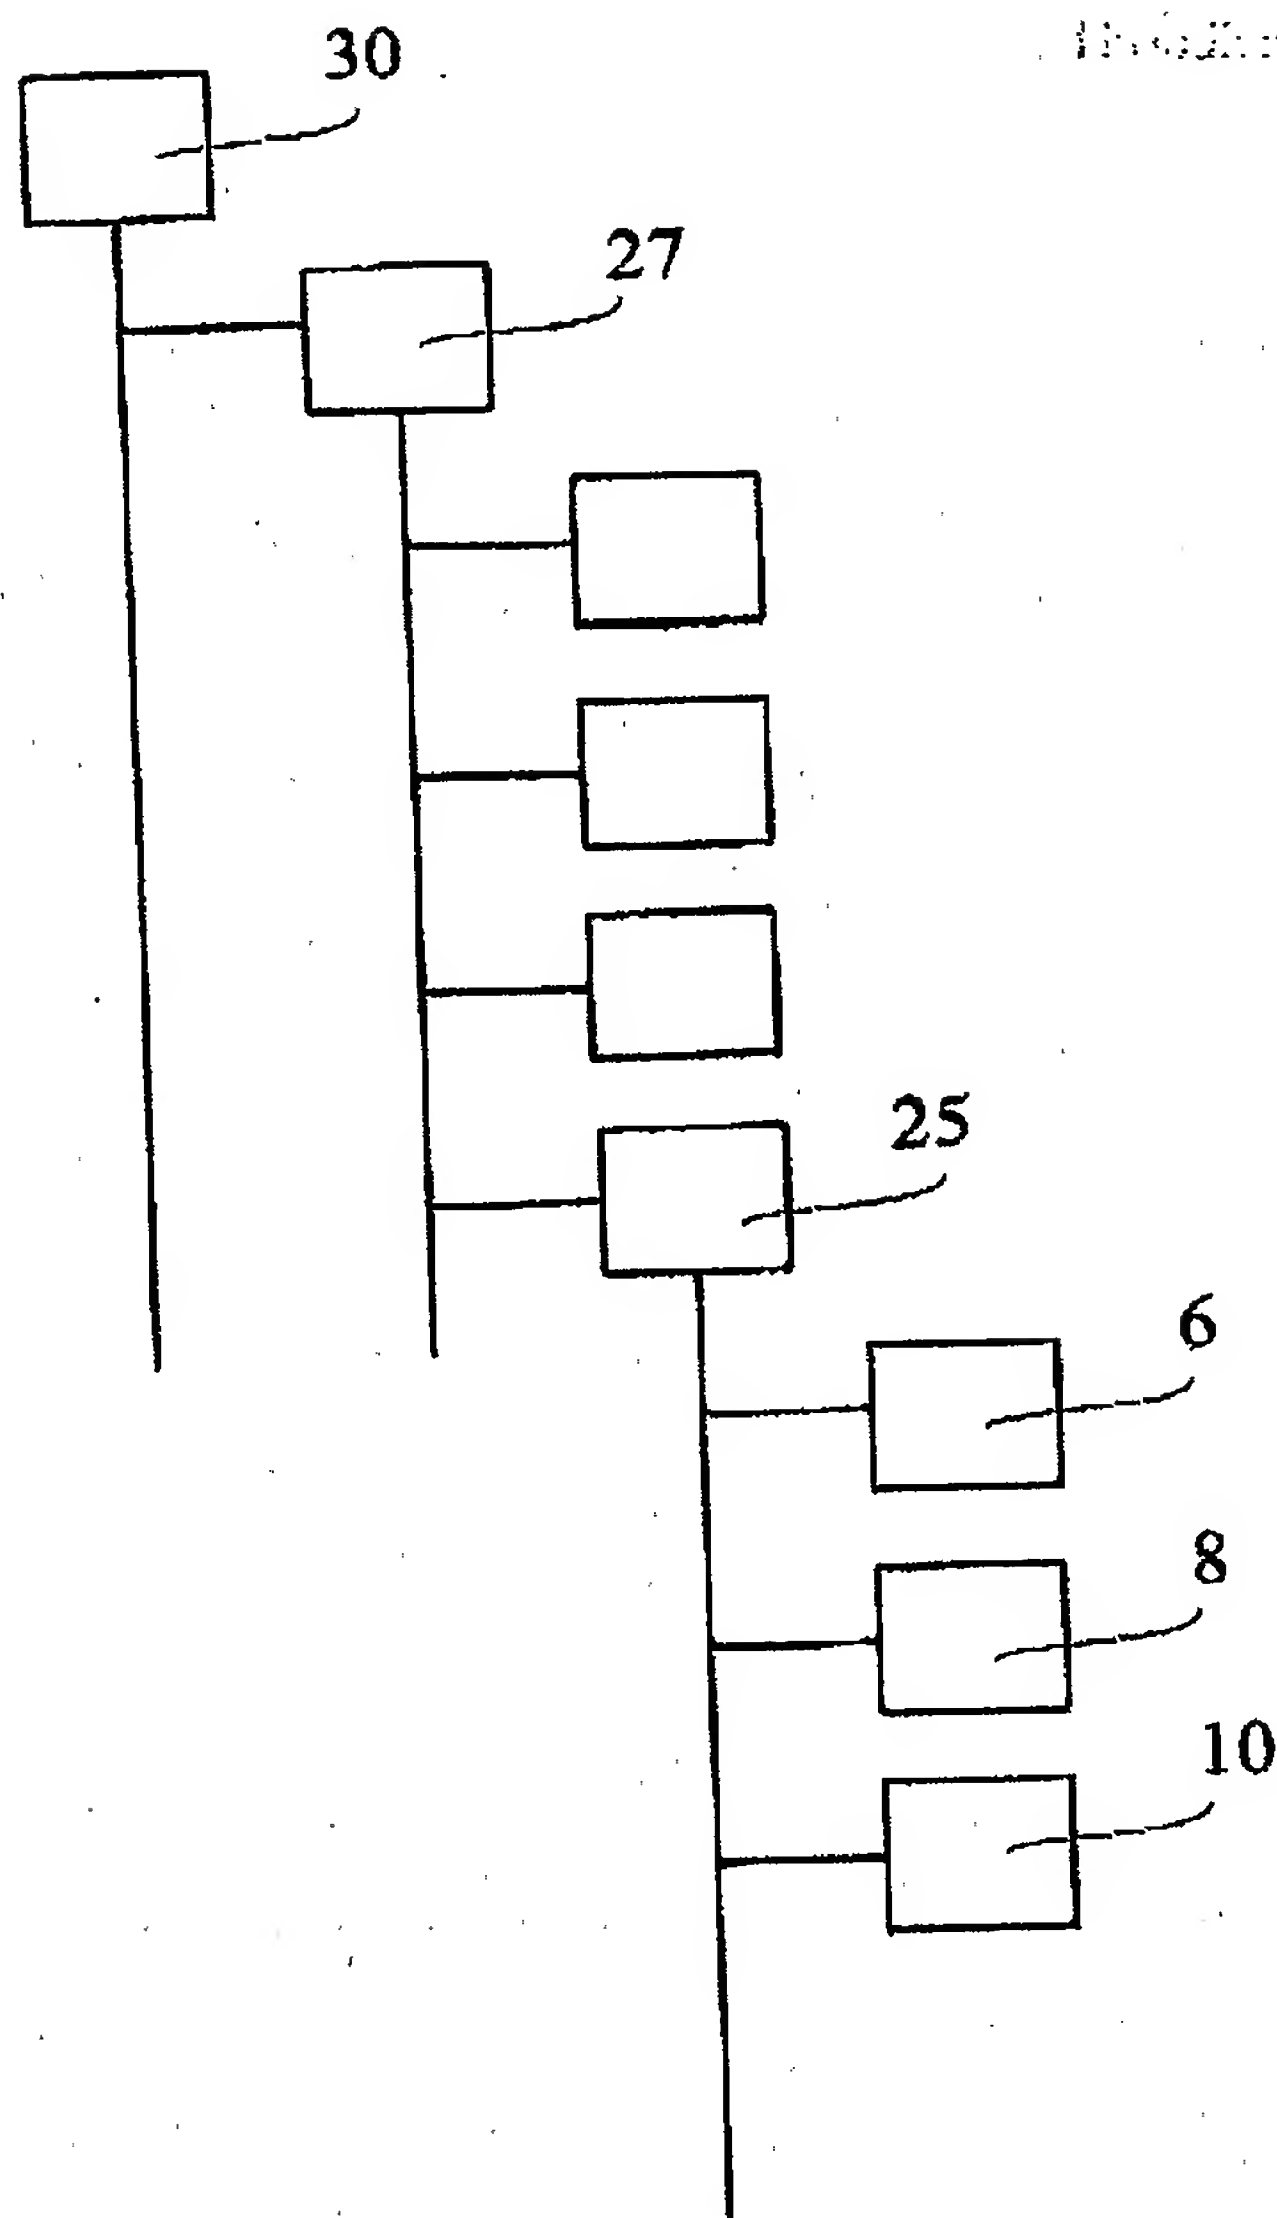


Fig. 2



Ink. t. Patent och reg. värdet

1 2 2 2 2

Konsultören Kassen

3 / 7

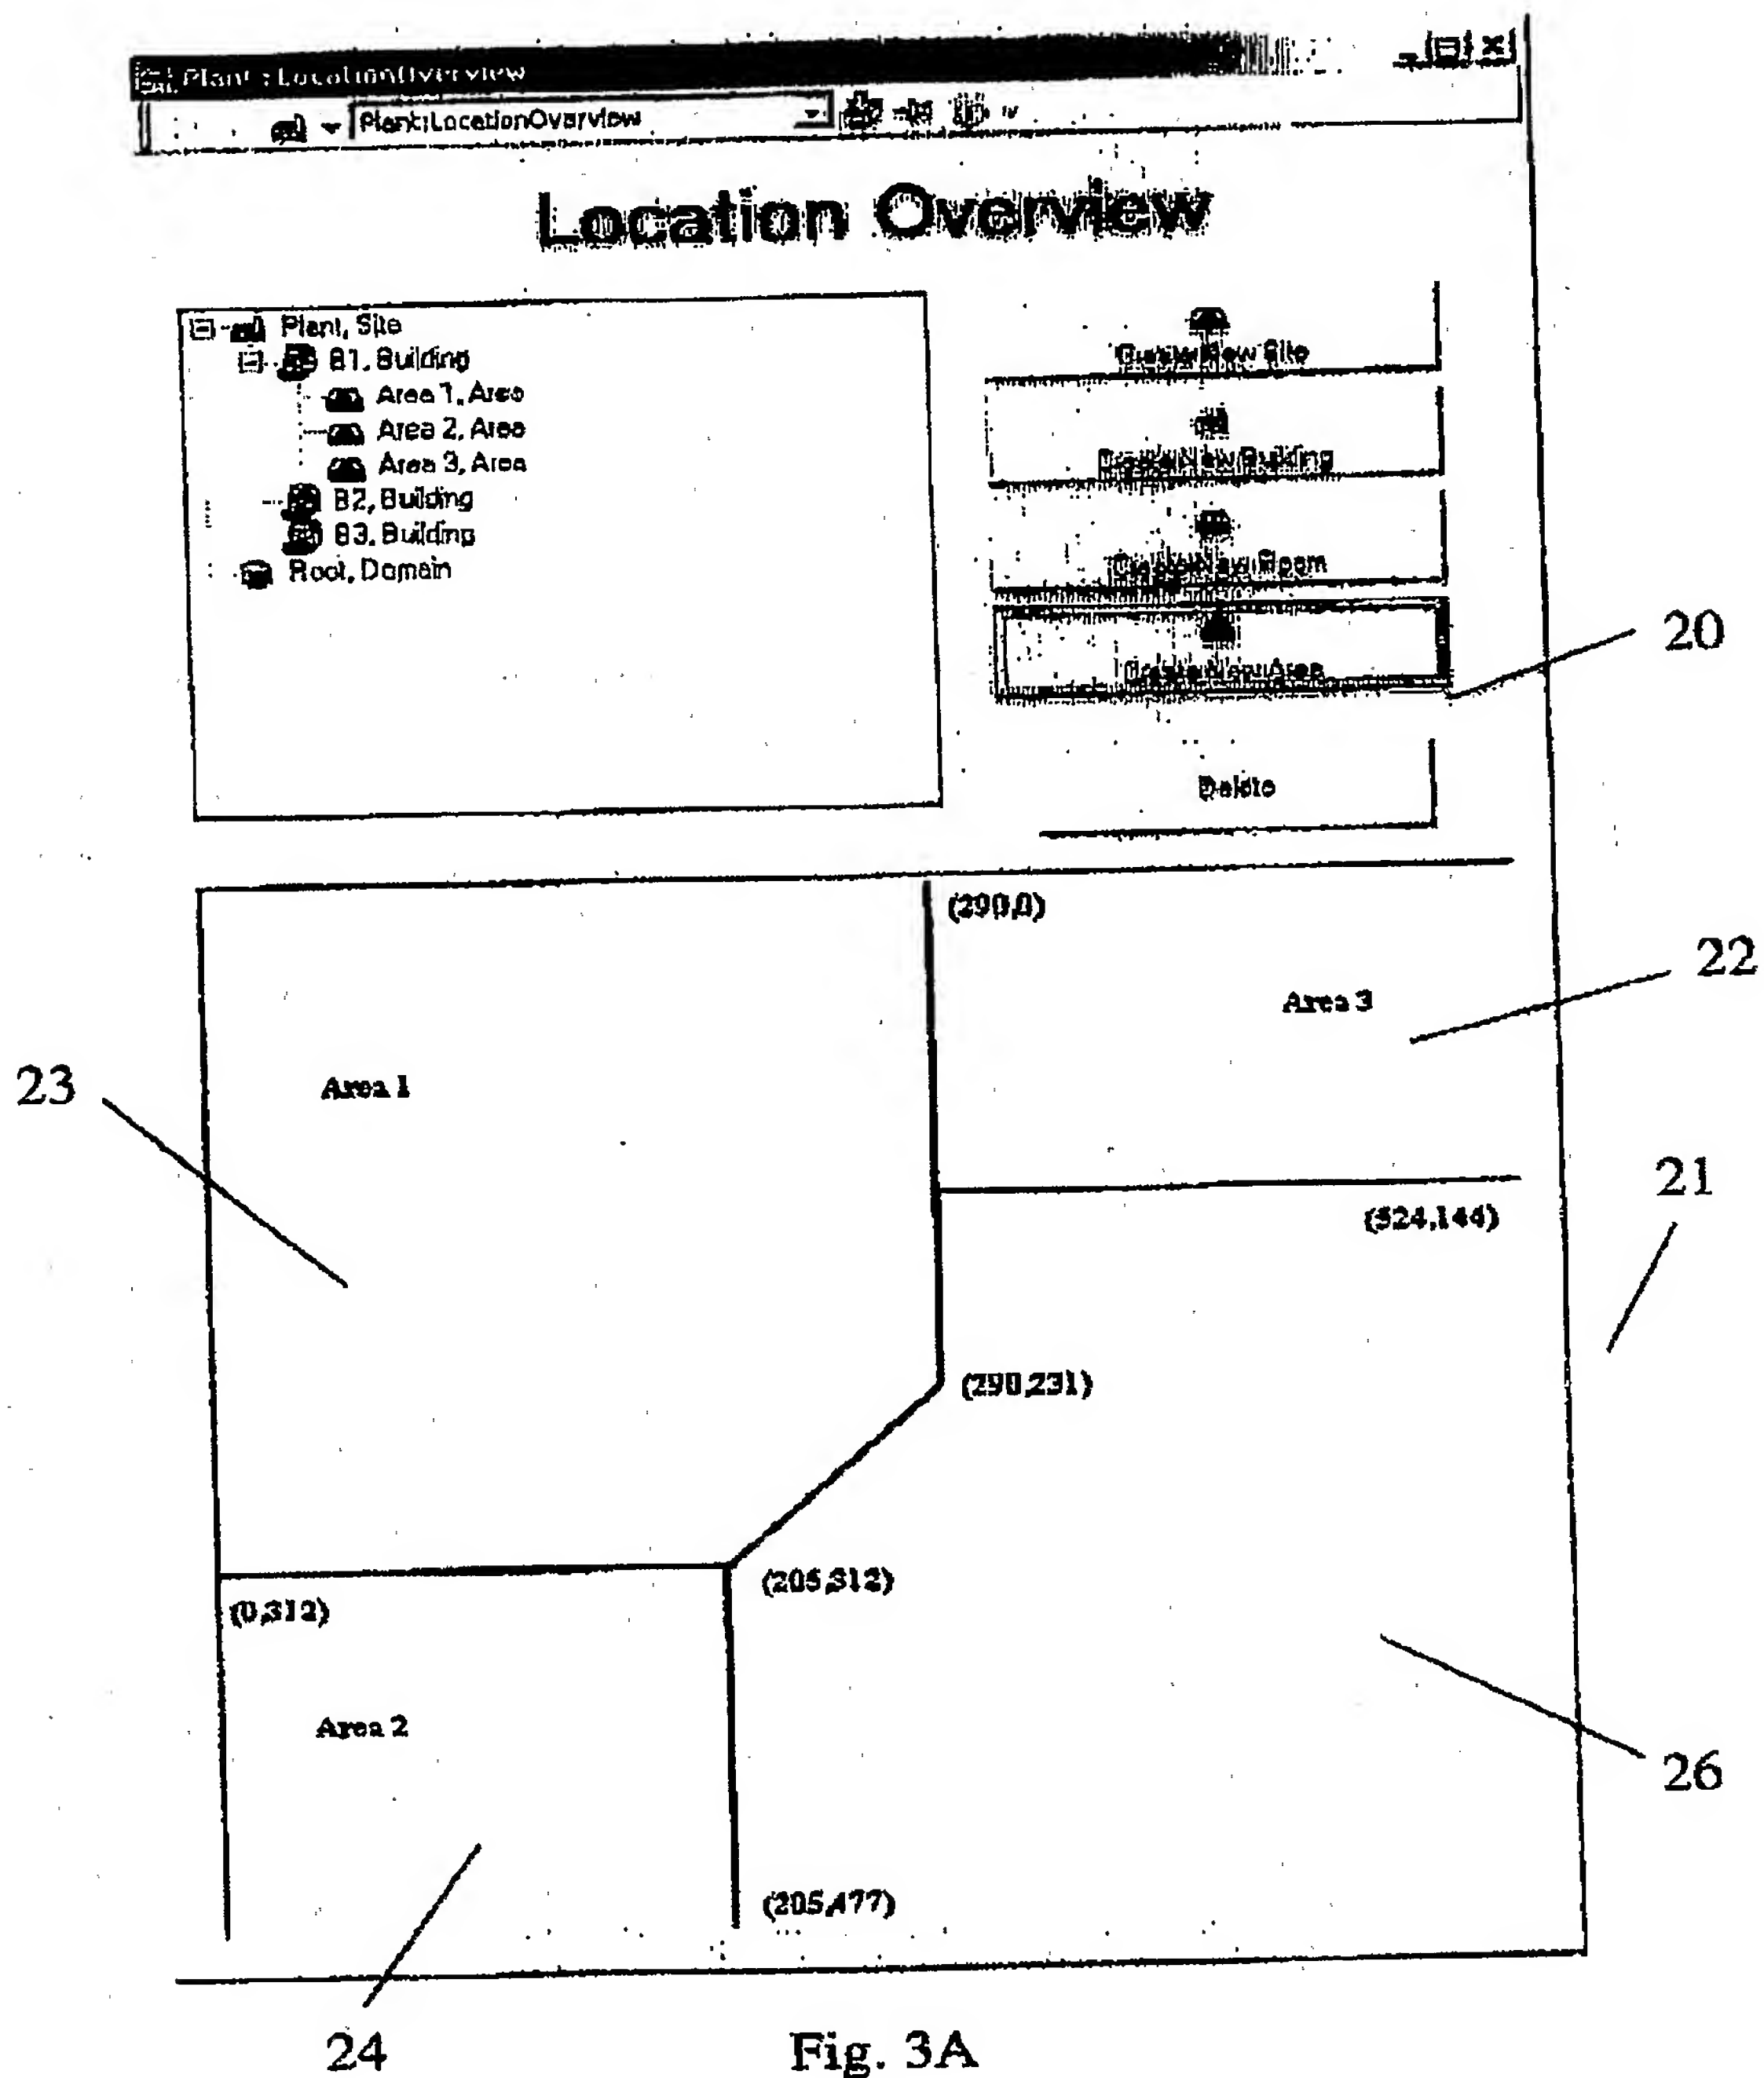


Fig. 3A

Ink. t. Patent- och registeret

2003-12-22

Märkskyls Mått

417

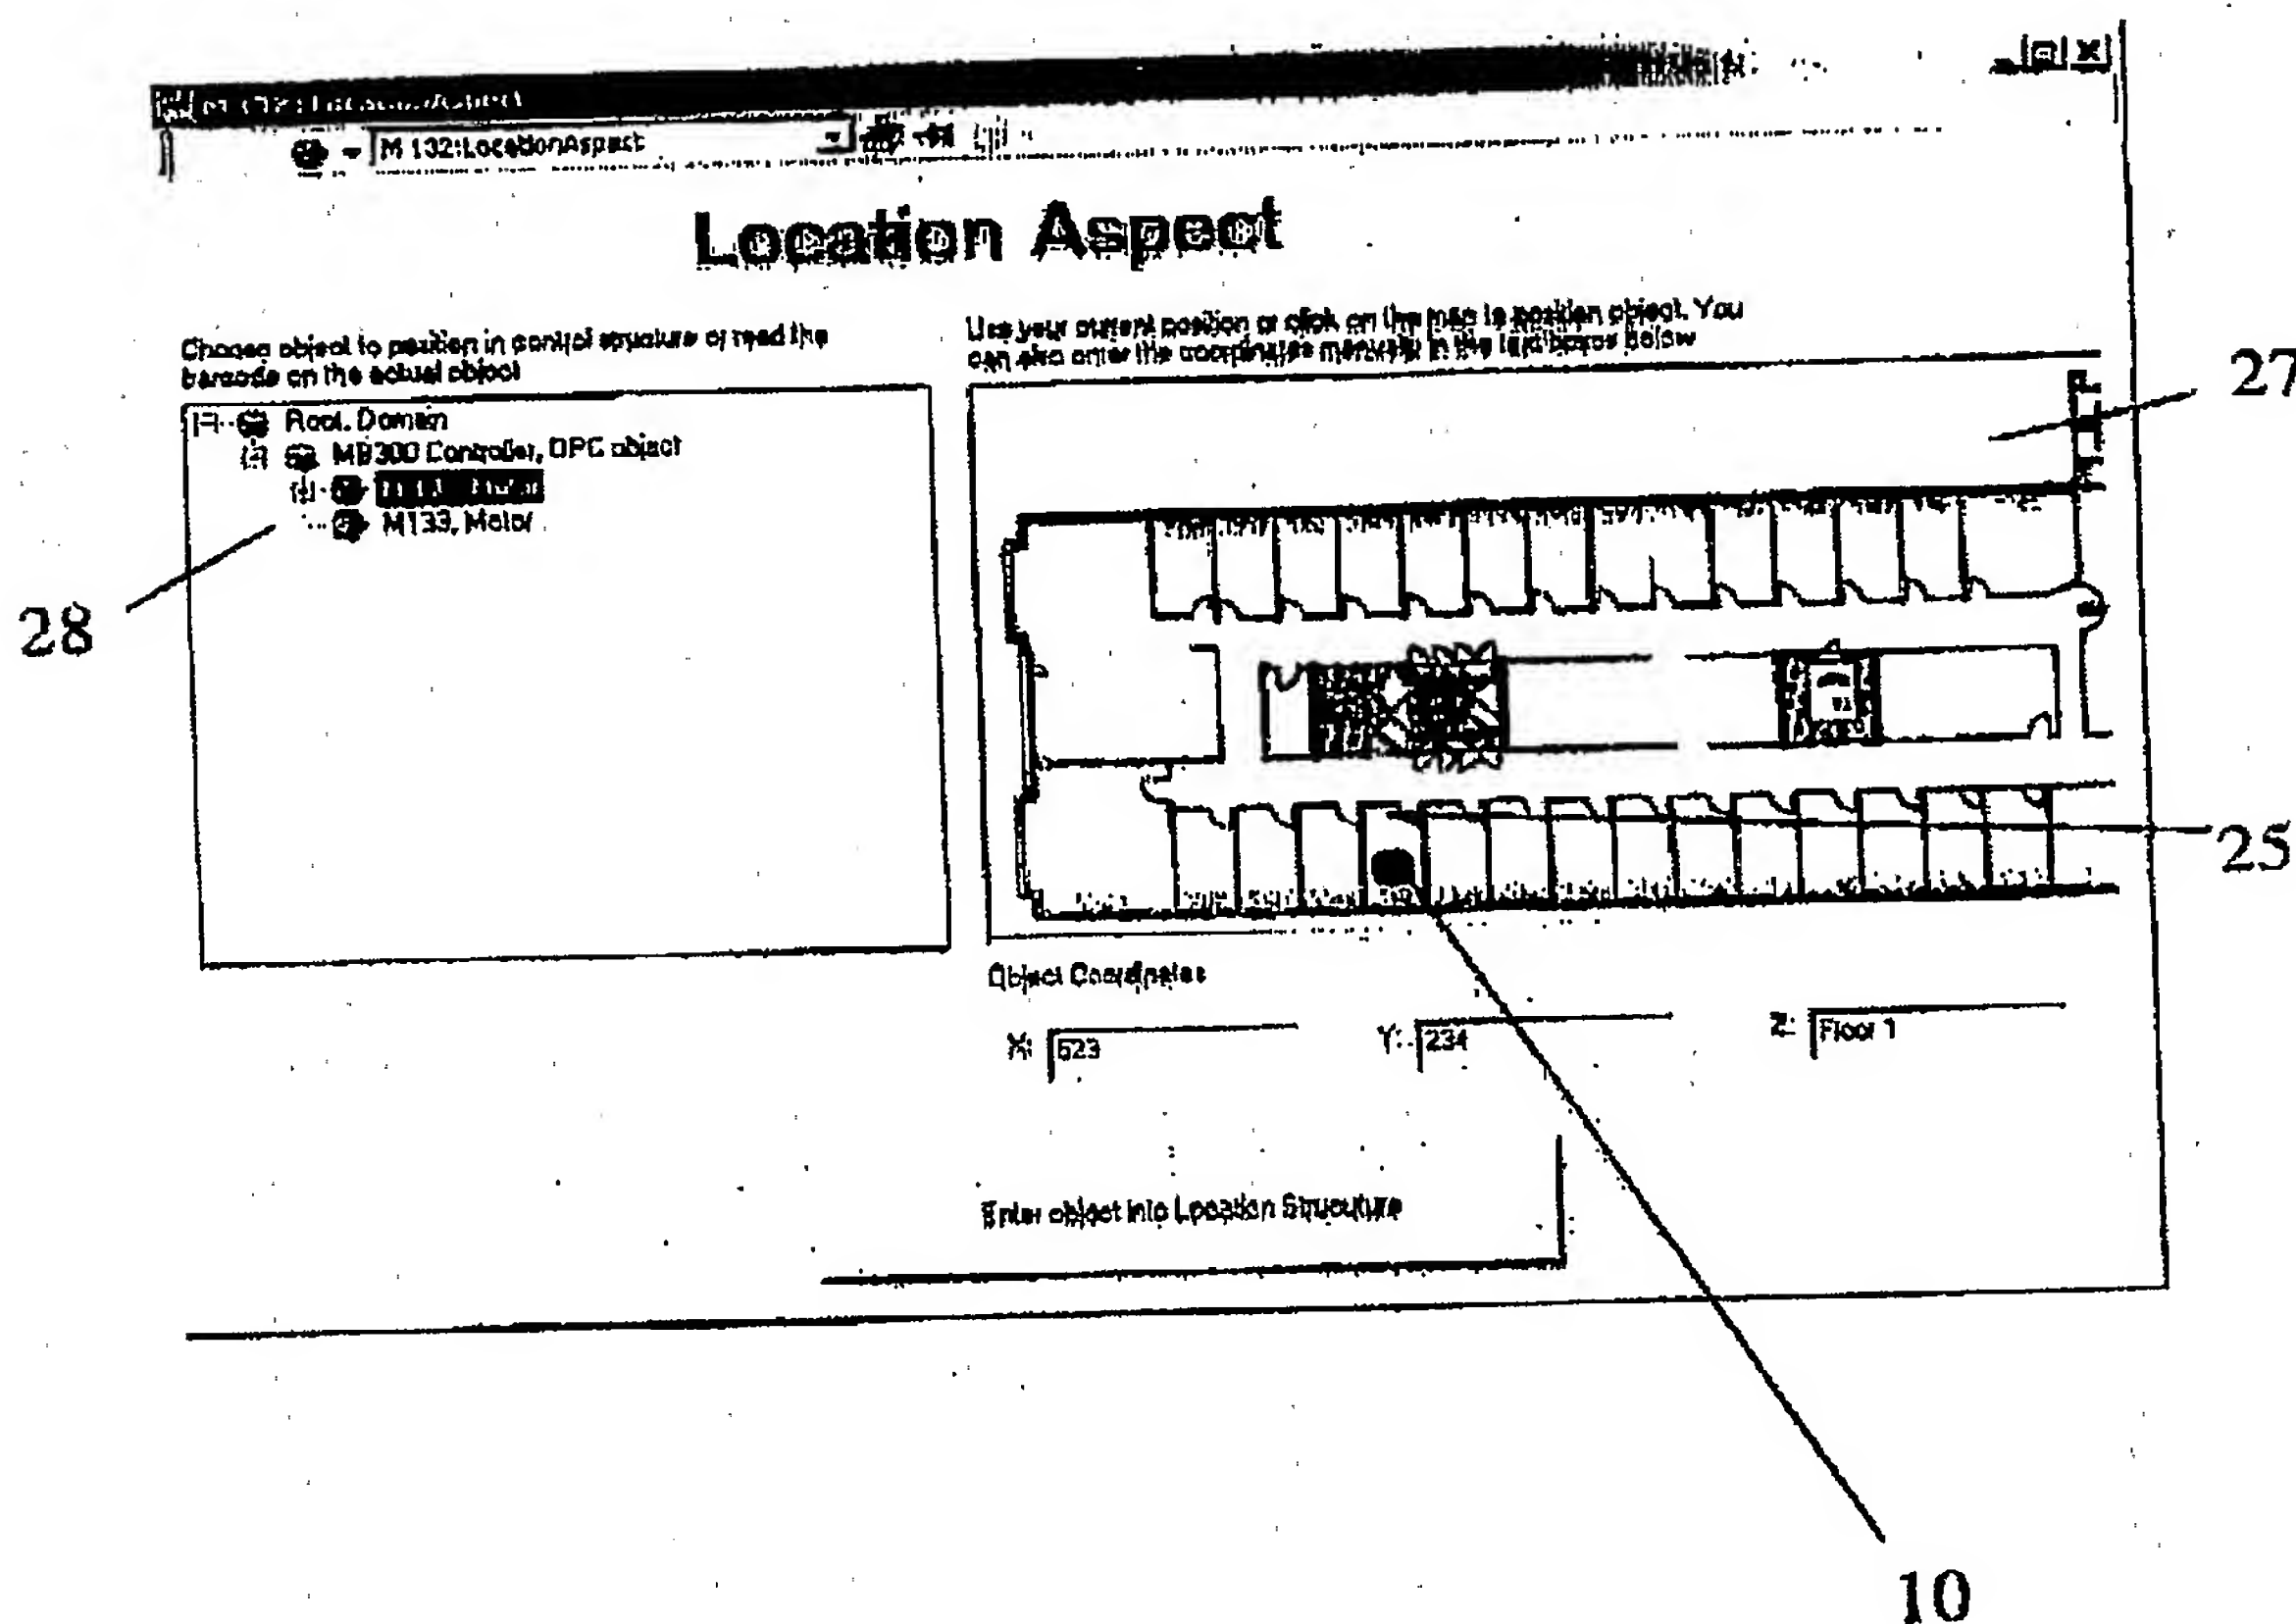


Fig. 3B

5 / 7

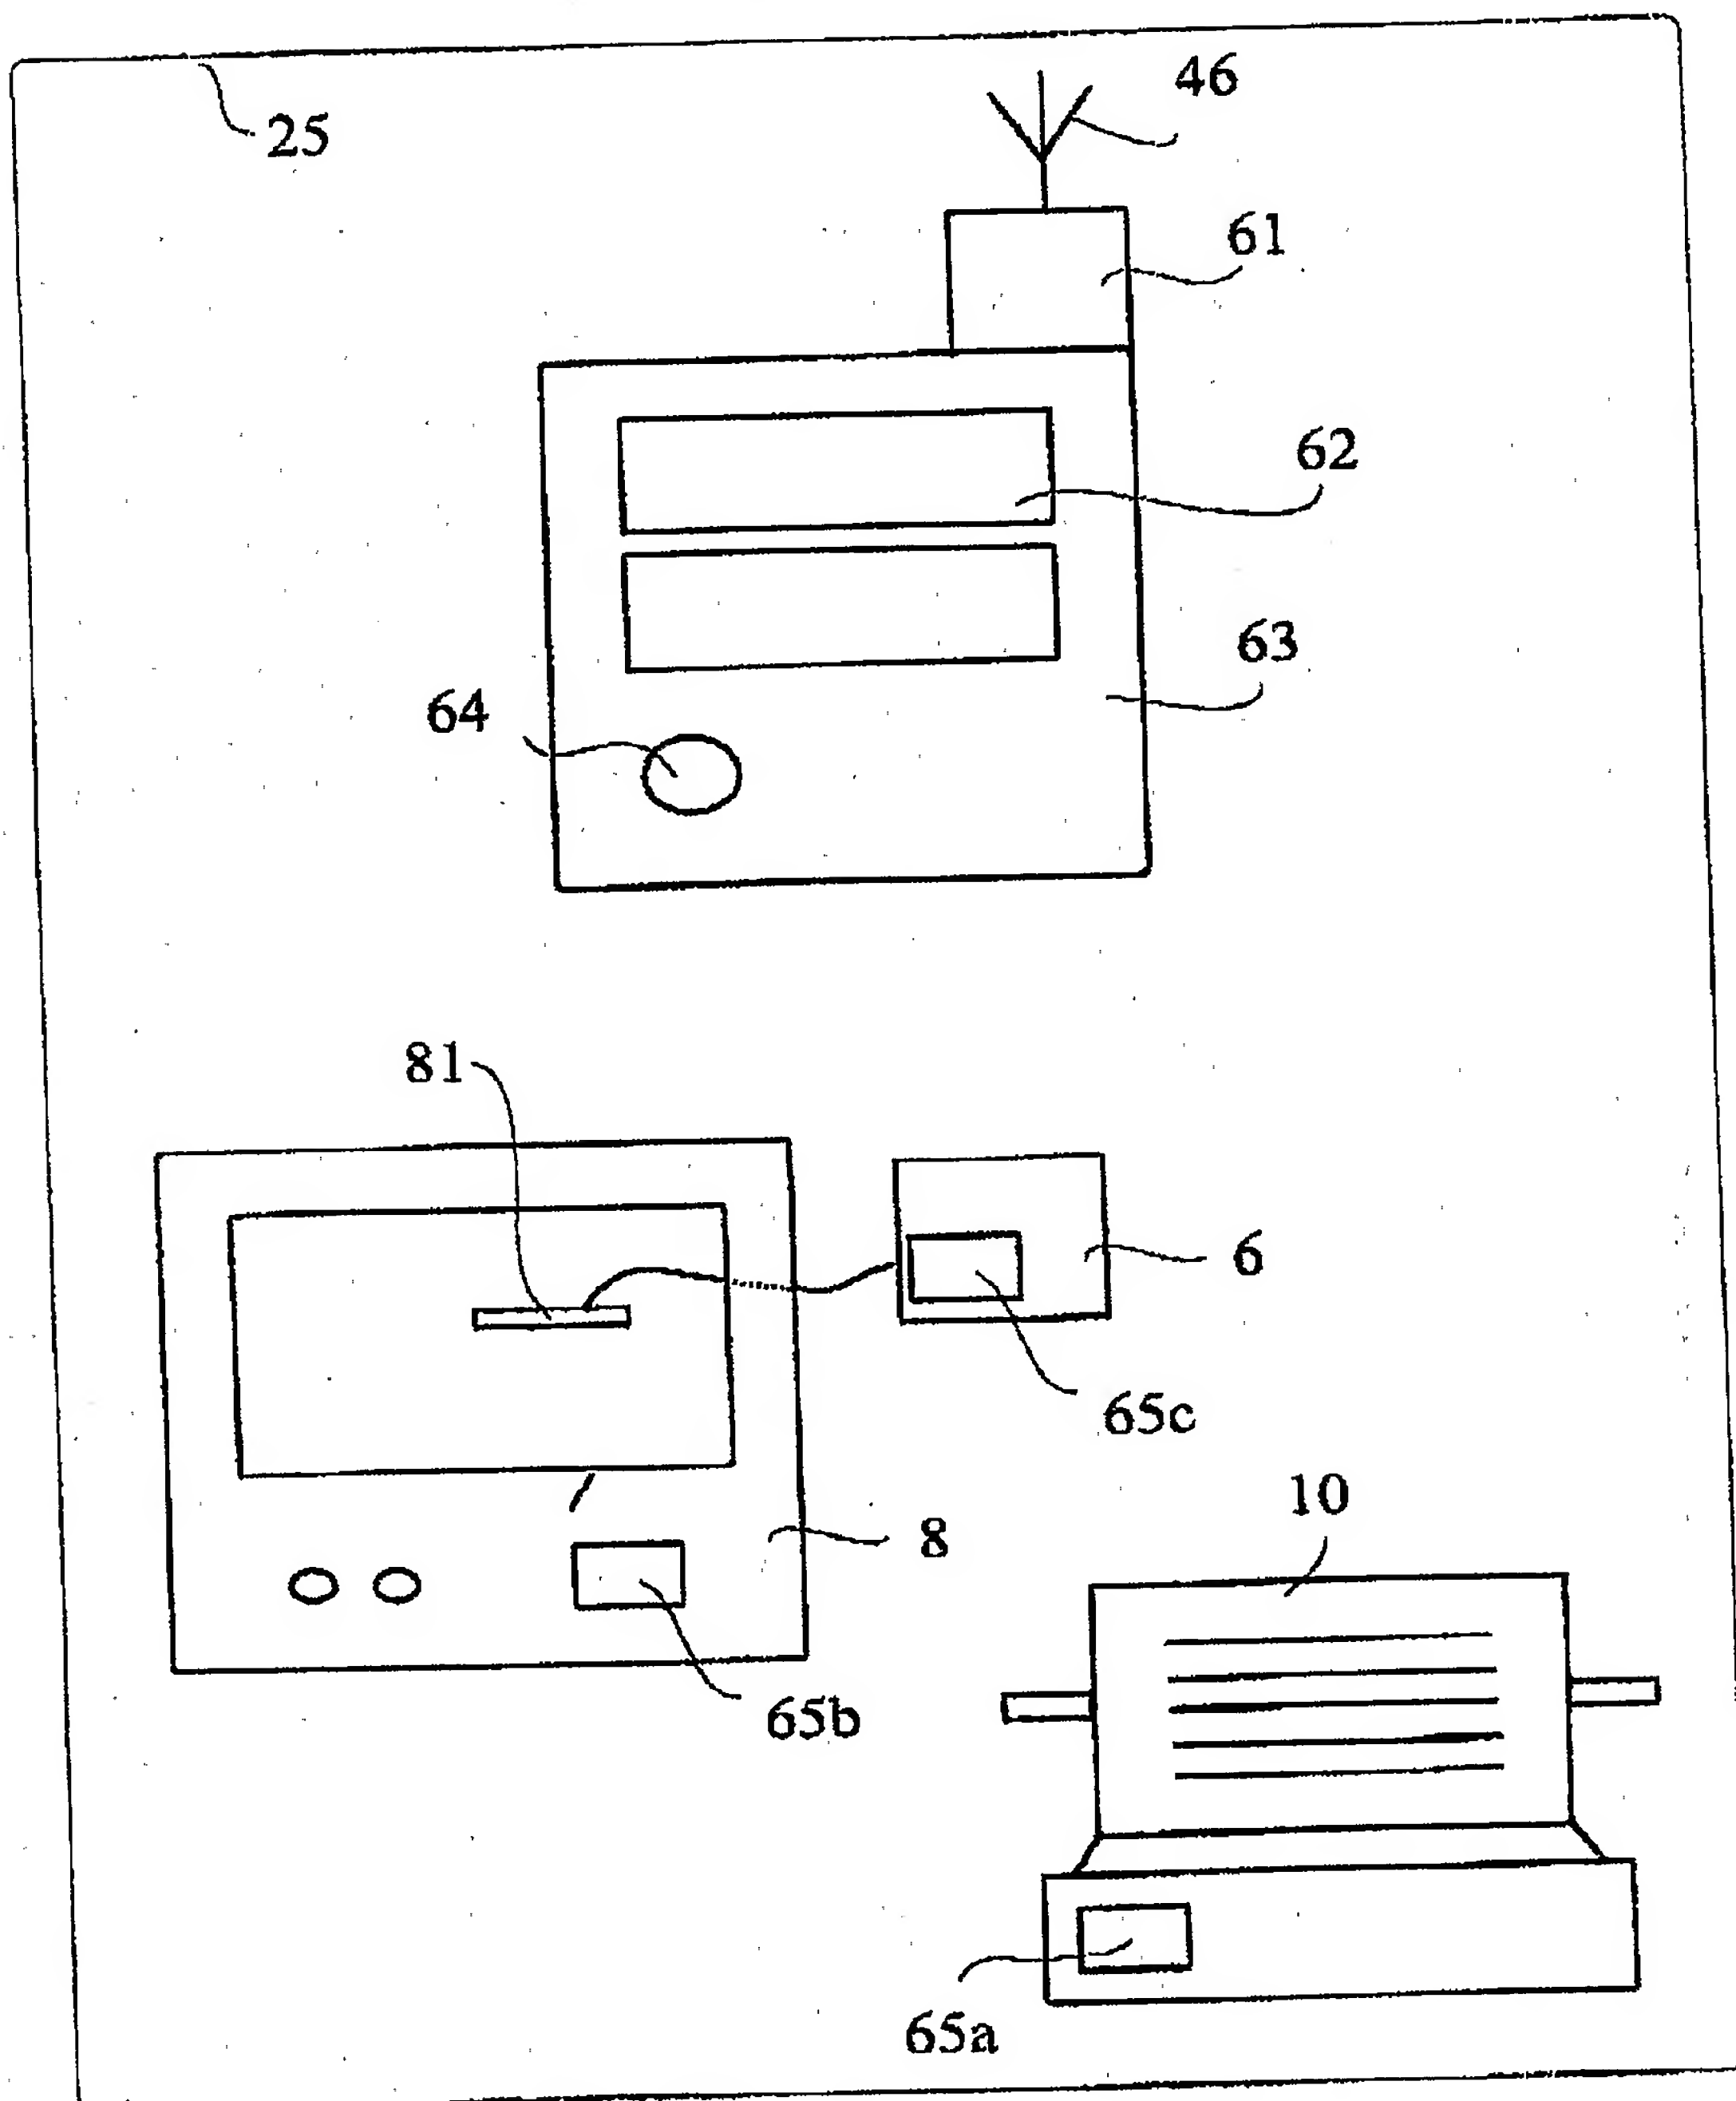




Fig. 4

6 / 7

Ink. t. Patent- och ärendet

2003-12-22

Svea Patentkammaren

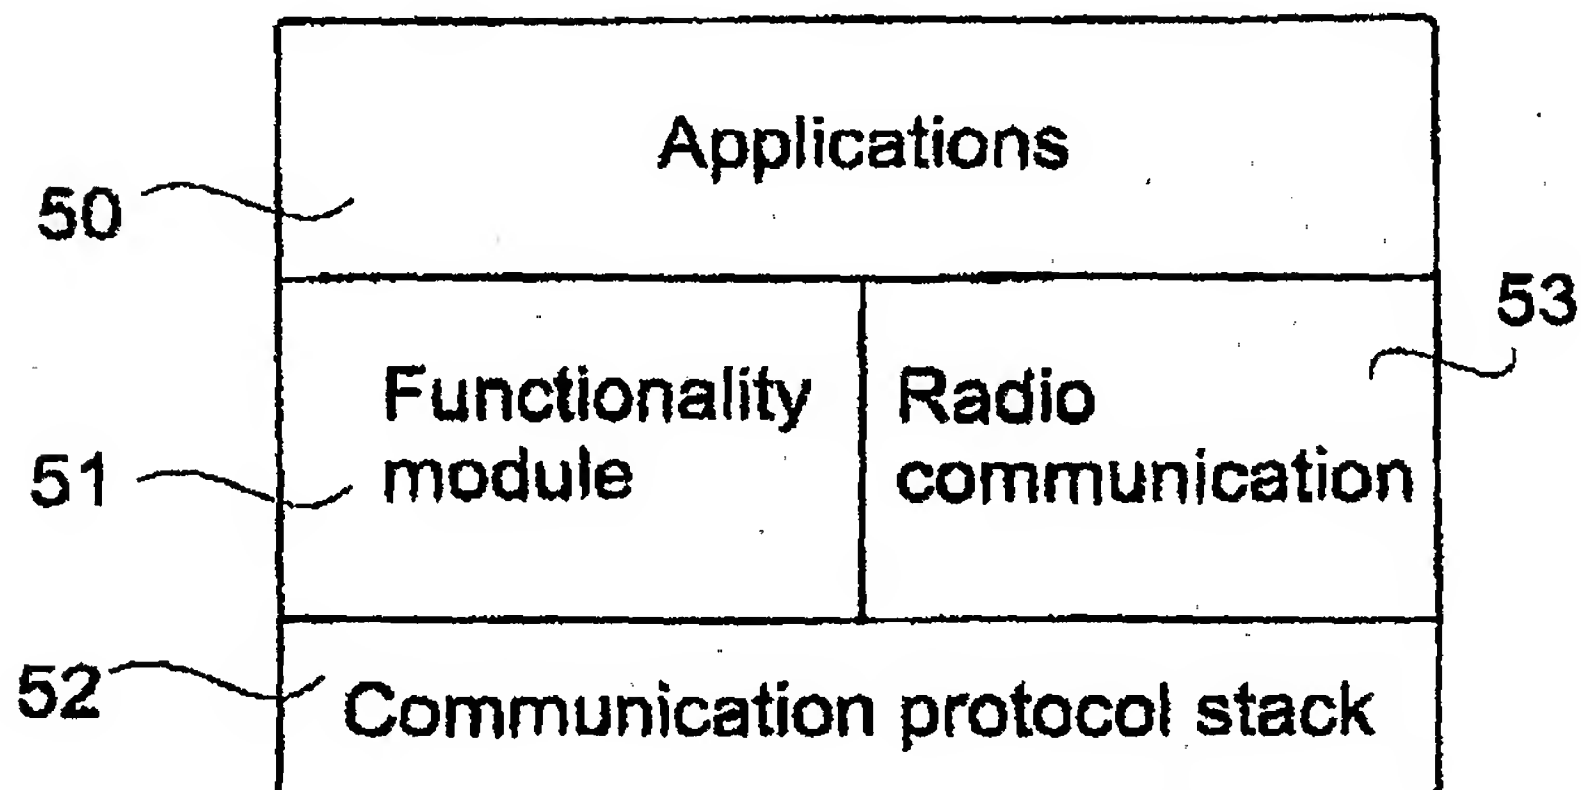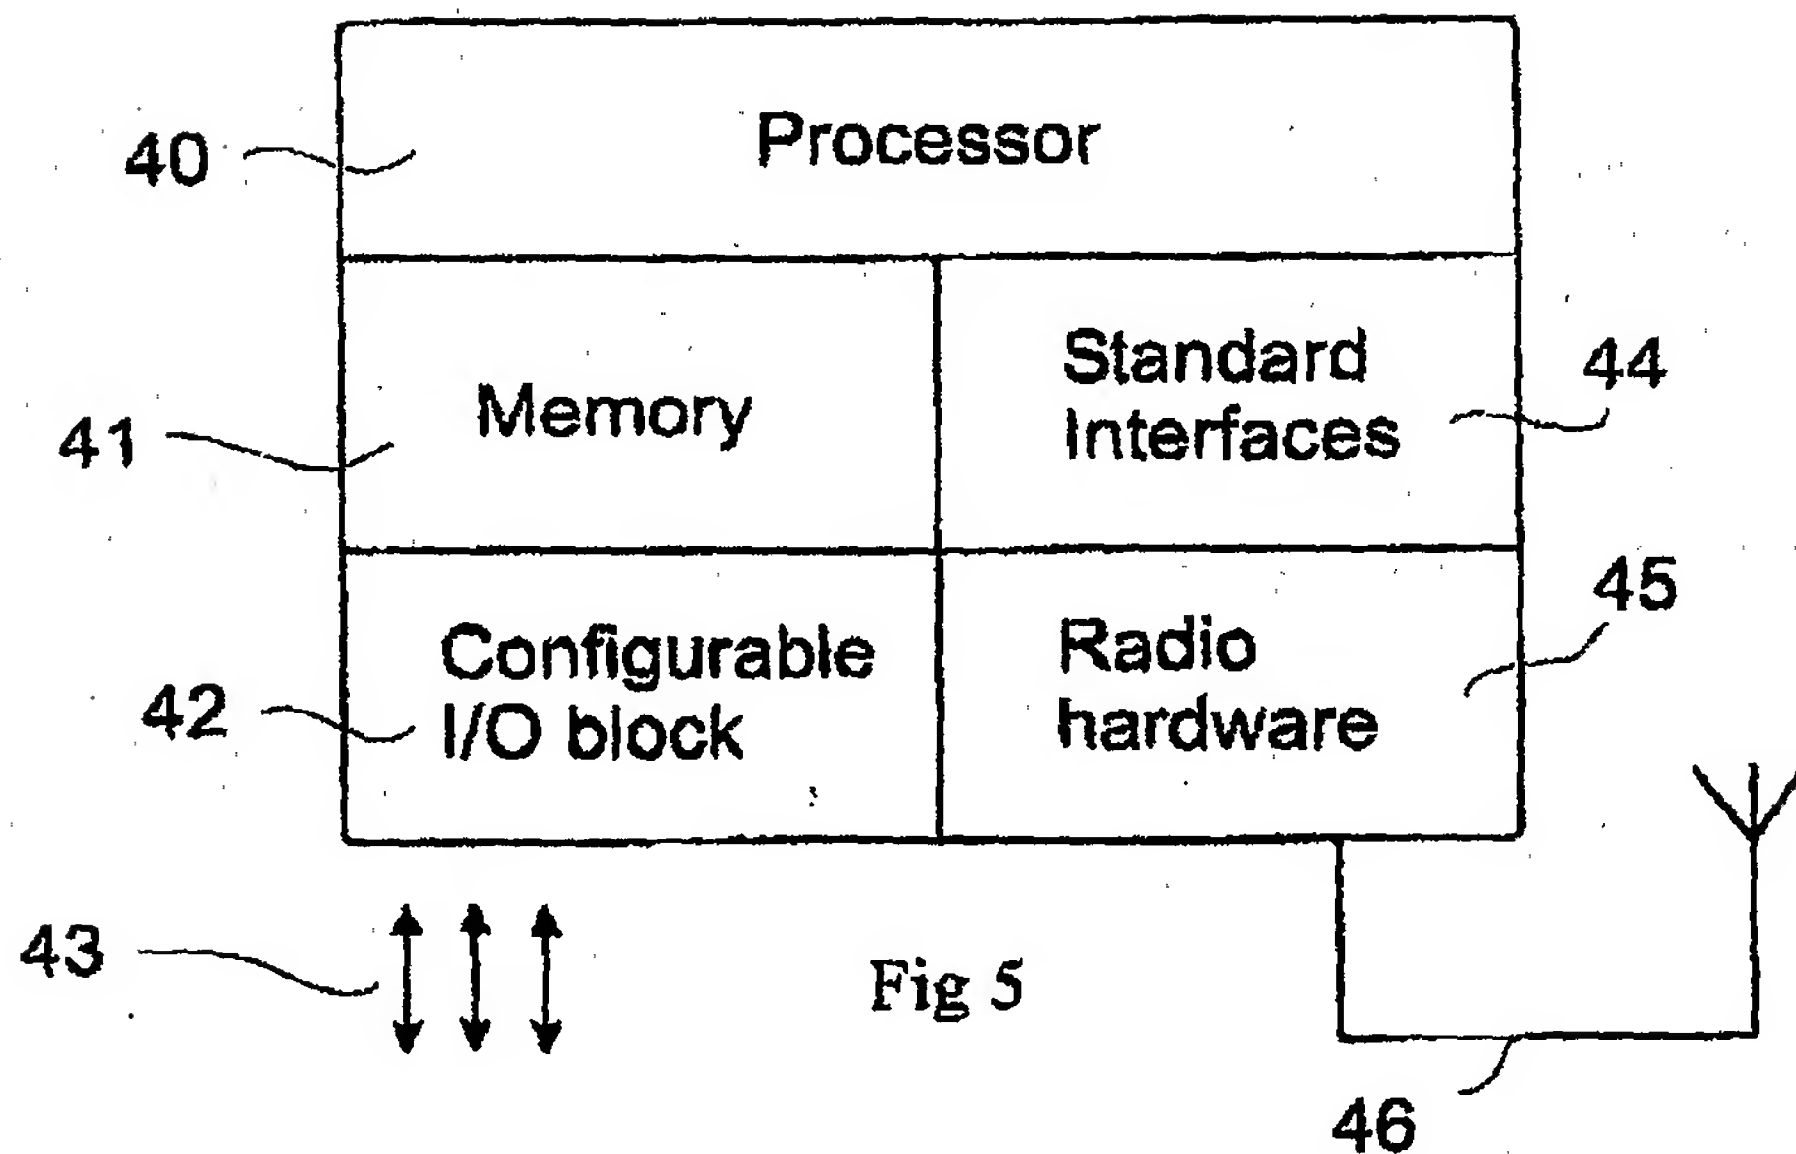



Int. t. Patent- och register

2003-12-22

Skriftligt godkänt

7 / 7

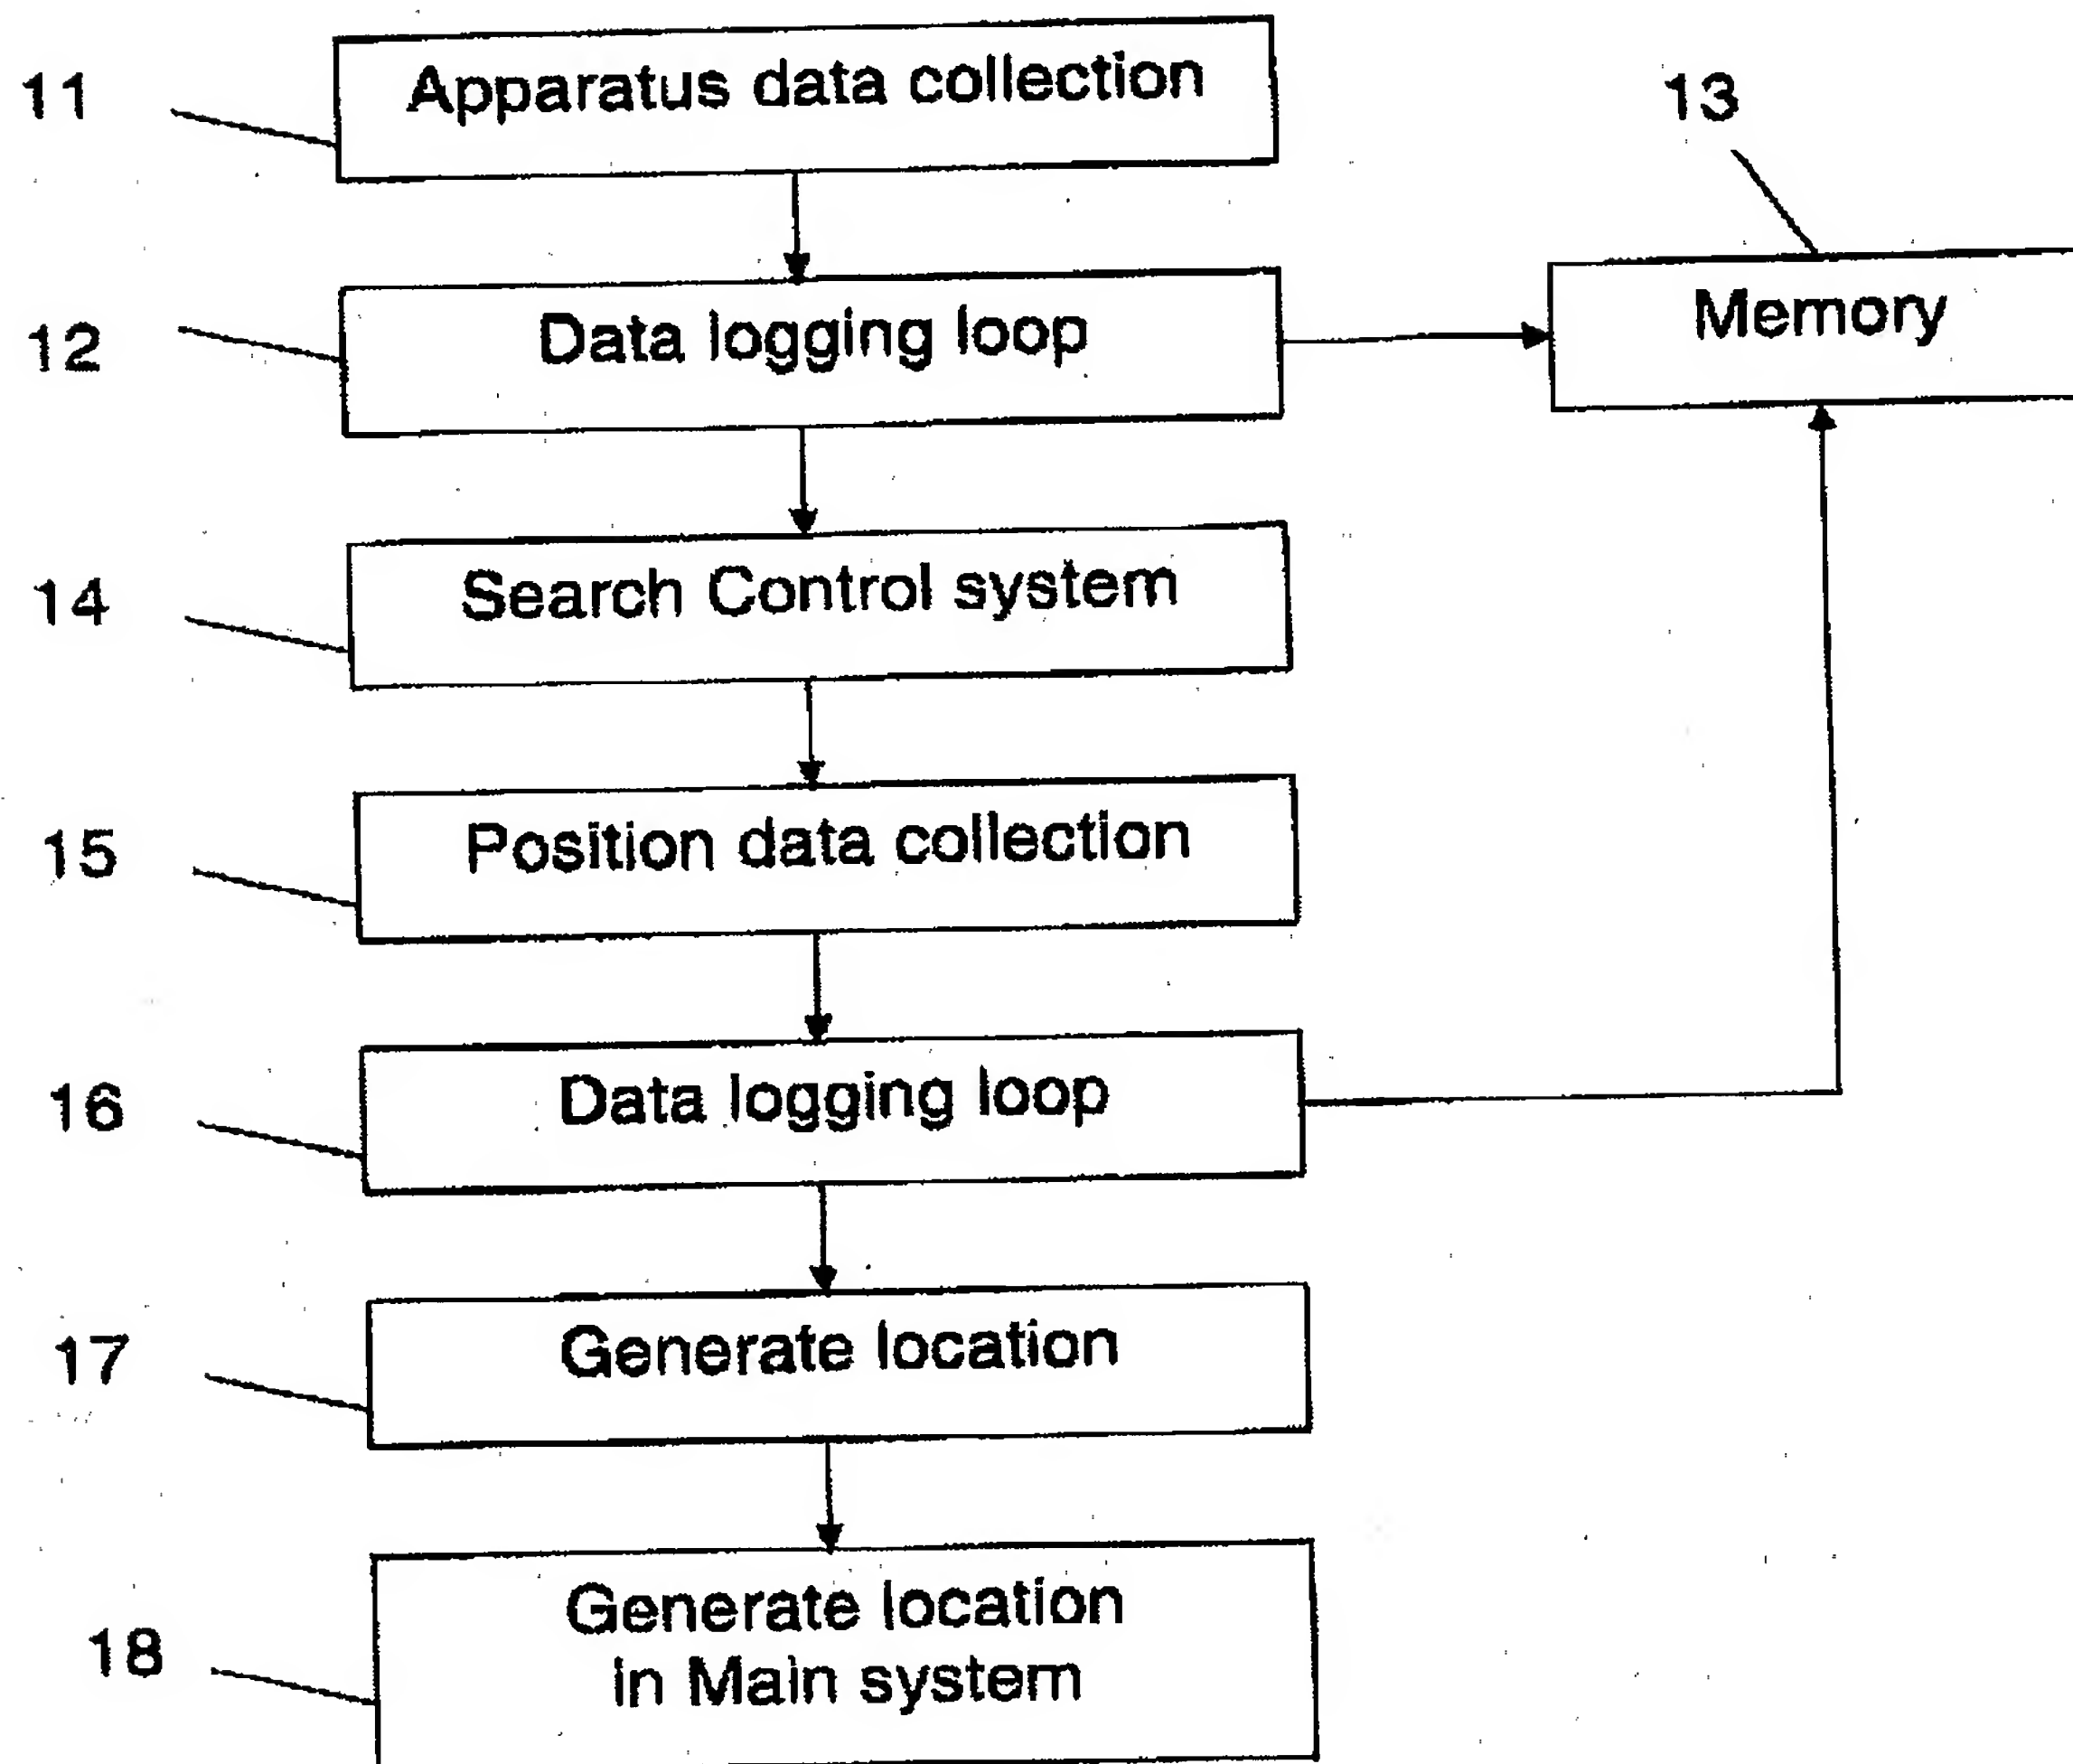


Fig. 7